


COM		BRISTOL INFO
ATIS	126.030	BRISTOL TOWER
TWR	133.850	BRISTOL DELIVERY
	121.930	BRISTOL FIRE
	121.600	
LIGHTING		
APCH 09	480m HI coded C/L with 3 bars.	
APCH 27	570m HI coded C/L with 3 bars. Supplementary inner 300m.	
THR 09/27	HI green uni-d with W bars.	
RWY 09/27	Elev HI bi-d with LI omni-d component final 600m yellow. HI colour coded C/L. End lights red.	
TWY	Taxiways A/B/G/Z green C/L. Blue edge on Taxiways A, B, D, F, H, J and Z.	



Annual Rate
of Change 0.20°E

WARNING
Aircraft landing on **Rwy 27** must
proceed to the end to vacate,
unless otherwise instructed by **ATC**.

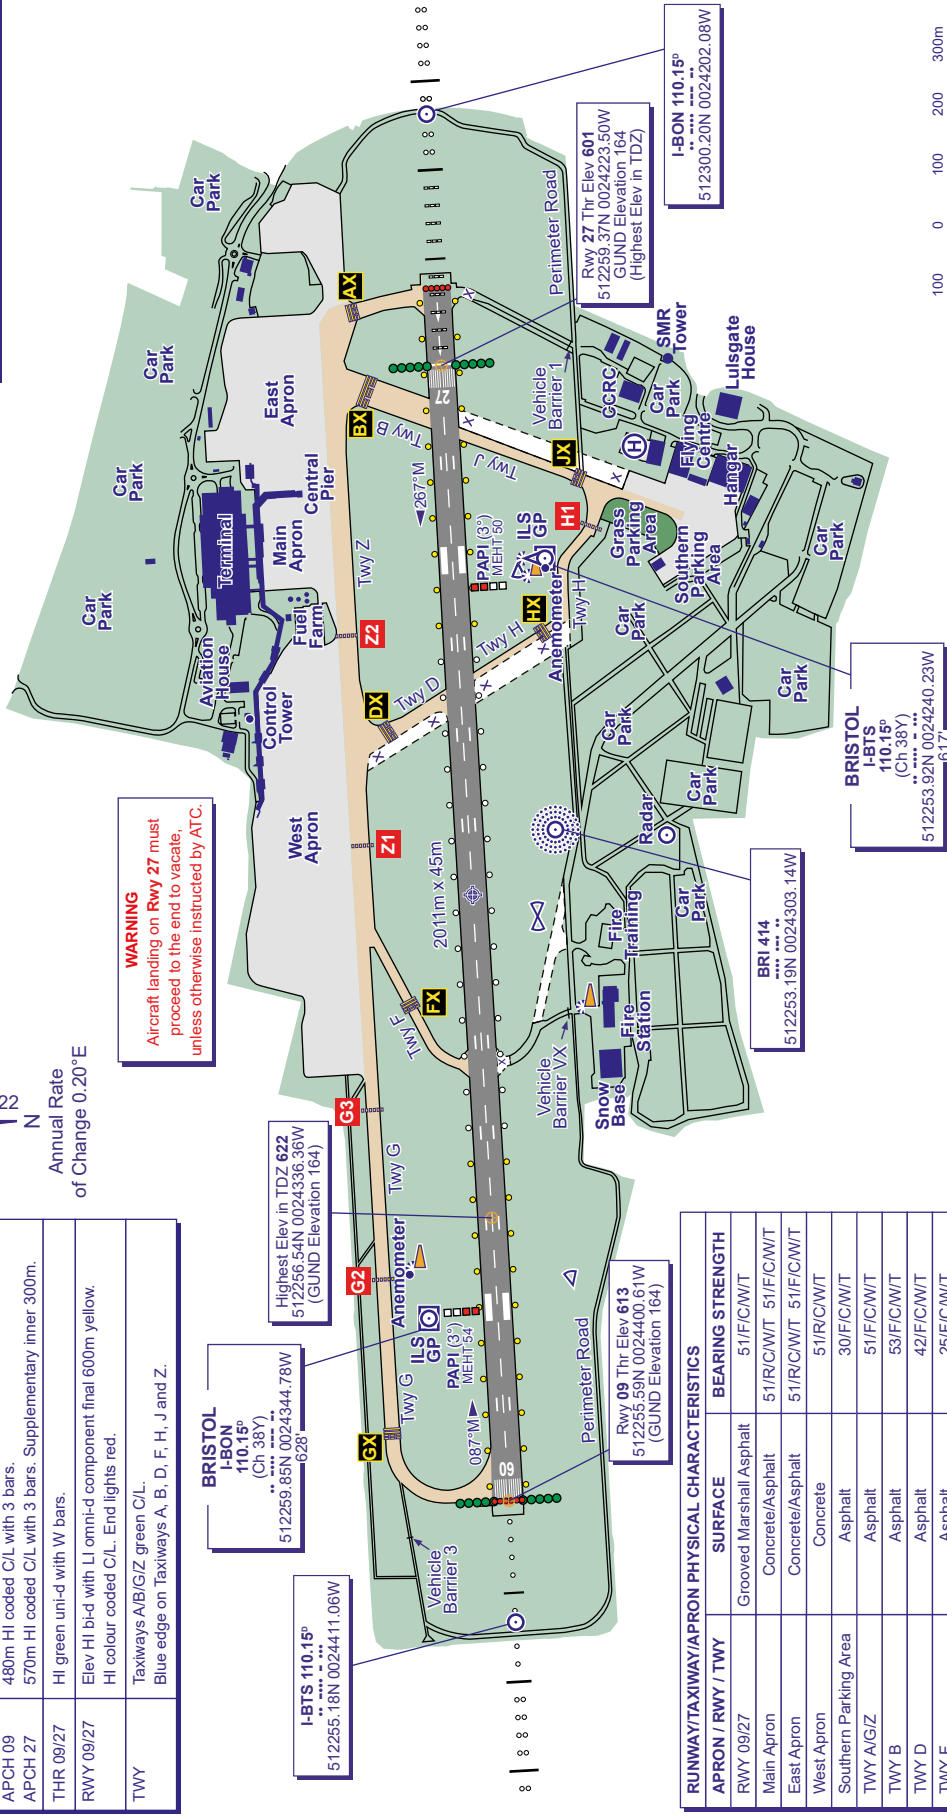

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	SURFACE	BEARING STRENGTH
RWY 09/27	Grooved Marshall Asphalt	51/F/C/W/T
Main Apron	Concrete/Asphalt	51/R/C/W/T 51/F/C/W/T
East Apron	Concrete/Asphalt	51/R/C/W/T 51/F/C/W/T
West Apron	Concrete	51/R/C/W/T
Southern Parking Area	Asphalt	30/F/C/W/T
TWY A/G/Z	Asphalt	51/F/C/W/T
TWY B	Asphalt	53/F/C/W/T
TWY D	Asphalt	42/F/C/W/T
TWY F	Asphalt	25/F/C/W/T
TWY H	Asphalt	20/F/C/Y/T
TWY J	Asphalt	30/F/C/W/T

CHANGE (6/22): WARNING BOX ADDED.